


'Piranha Off Road products are not associated in any way with Toyota Australia or any of its related companies'

To Suit PRADO 90 SERIES / HILUX PETROL
Prado / Hilux 5FZ-FE 3.4L V6
Prado 3RZ-FE 2.7L (Non ABS)



PART NUMBER	BTPRA4C
APPROX FITTING TIME	2 Hour
MAX BATTERY SIZE	235mm L
MAX BATT WEIGHT	16Kg
CYCLE DUTY	
TRAY LOCATION	PSR

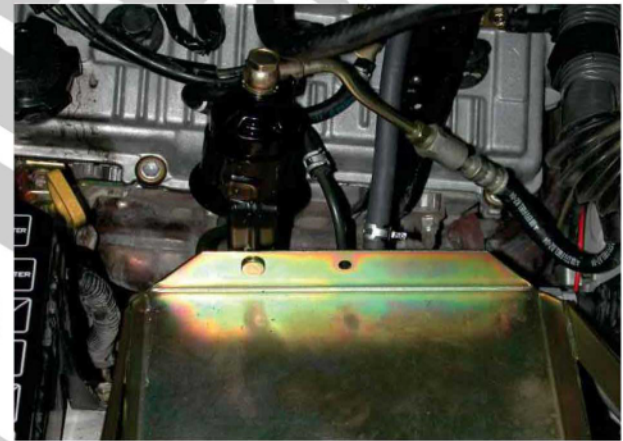

PARTS INCLUDED WITH TRAY

- 1 X Tray
- 1 X M8 Bolt*
- 1 X M8 Bolt Short*
- 1 X M6 Bolt Long
- 3 X M6 Bolt
- 2 X M6 Countersunk**
- 1 X M6 Weld Bolt
- 5 X M6 Weld Nut**
- 1 X Body Washer
- 4 X Small Body Washer
- 2 X Self Drill Screws*
- 1 X Special Top Mount
- 2 X J Bolt

* Part Not Required for Hilux
** Not all are required for Hilux

RECOMMENDED ISOLATOR

DBE140SF
or
DBE180-SX

FITTING INSTRUCTIONS

The cradle fits passenger side rear.

This cradle fits:

- Prado 4 Cylinder 3RZ-FE
- Prado V6 non ABS 5VZ-FE
- Hilux V6 5VZ-FE

To fit this cradle the charcoal canister must be relocated usually to the driver side where most vehicles have the same bolt locations next to the brake booster. The hoses for the charcoal canister will have to be extended.(Not Supplied)

The fuel filter will need to be moved and can be mounted to the tray by drilling a 6mm hole and secure with M6 weld bolt and nut.

Ensure battery top mount secured to guard

Note: If vehicle has Cruise Control, please allow extra 1 hour for fitting
Ensure, before closing the bonnet that all items fitted have adequate clearance